



6V

5Ah

SLA

AGM

6SB5P

Rechargeable AGM Sealed Lead Acid Battery

SPECIFICATIONS

Nominal Voltage 6V

Nominal Capacity

20 hour rate	(0.250A to 5.01V)	5Ah
10 hour rate	(0.428A to 5.25V)	4.275Ah
5 hour rate	(0.765A to 5.1V)	3.825Ah
1C	(4.5A to 4.8V)	2.55Ah
3C	(13.5A to 4.8V)	1.80Ah

Weight Approx. 820g

Internal Resistance (at 1KHz) Approx. 19mΩ

Maximum Discharge Current (5 secs) 67.5A

Charge Methods at 25°C

Cycle Use

Charging Voltage 7.20V to 7.50V
Coefficient -5.0mV/°C/Cell

Maximum Charging Current 1.35A

Standby Use

Float Charging Voltage 6.75V to 6.90V
Coefficient -3.0mV/°C/Cell

Operating Temperature Range

Charge -15°C to 40°C

Discharge -15°C to 50°C

Storage -15°C to 40°C

Charge Retention (Shelf Life) at 20°C

1 month	92%
3 months	90%
6 months	80%

Case Material ABS UL94 HB

Termination F1 (Faston Tab 187)

Design Life 3-5 Years

Classified as a non-spillable battery.
Approved for transportation by:

- Air (IATA/ICAO provision A67)
- Road
- Sea (per IMDG Special Provision 238)



Barcode




9319632520574




DIMENSIONS

mm (inch)

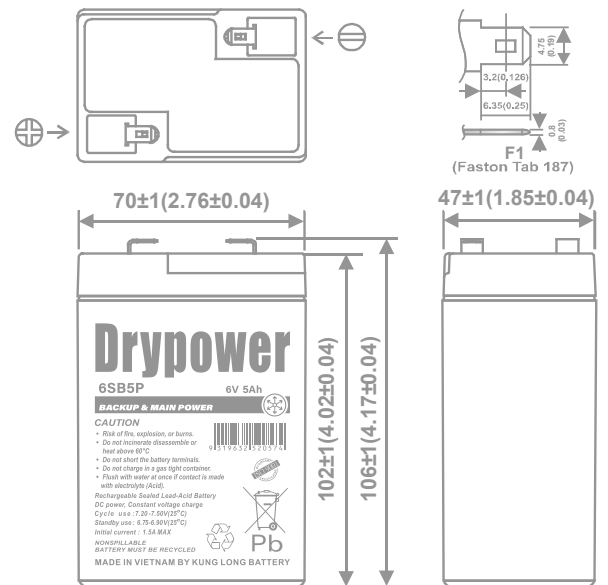

(V)
FOR 6V
BATTERY


Discharge Time VS. Discharge Current (25°C)

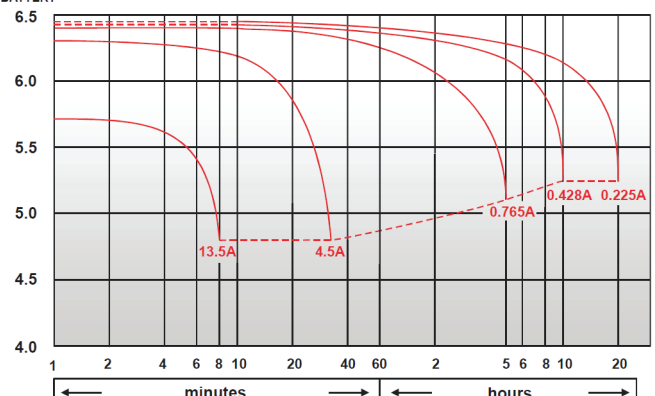


Discharge Time

CHARACTERISTICS CHARTS


Effect of Temperature on Capacity 25°C (77°F)

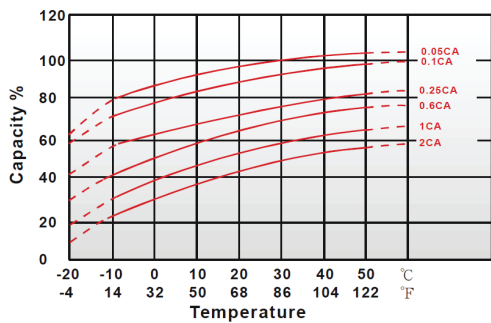


Capacity Retention Characteristic

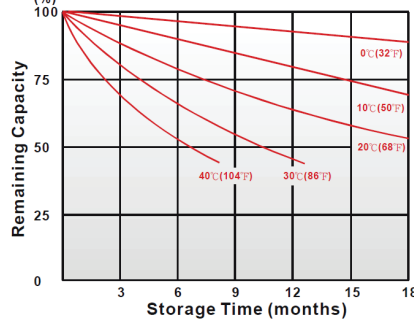

Cycle Service Life

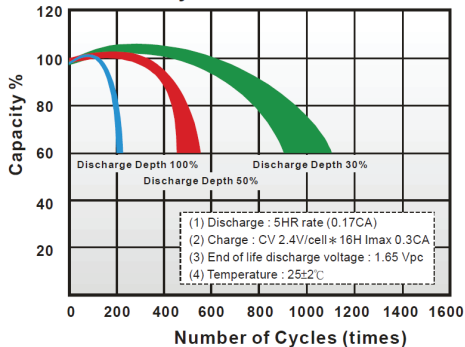

Trickle (or float) Service Life



FEATURES & BENEFITS

- ◆ Industry leading 99.99% pure lead content for superior service life and dependable performance.
- ◆ Maintenance free technology and non-spillable design.
- ◆ Excellent charge retention in storage.
- ◆ Higher percentage of tin content compared with the industry standard. Tin extends battery standby life by minimising sulphation (corrosion) especially at higher temperatures.
- ◆ Manufactured by Kung Long Battery (KLB) at facilities in Taiwan and Vietnam.

KLB is a leading manufacturer and complies with relevant international quality standards including ISO9001, CE ETL9000, UL1989, OHSAS18001 and ISO17025.

KLB supports Green Sustainable supply chain practices.



PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	23.8	26.8	29	31	31.8	32.8	34
10	min	17	19.2	20.5	21.5	22	22.5	23
15	min	14.1	15.6	16.2	16.5	16.7	16.8	17
30	min	8.18	9.15	9.52	9.7	9.8	9.92	10
60	min	4.2	4.77	5.13	5.43	5.53	5.65	5.73
120	min	2.48	2.77	2.9	3	3.05	3.12	3.18
180	min	1.97	2.17	2.27	2.35	2.38	2.43	2.48
240	min	1.6	1.73	1.8	1.85	1.88	1.92	1.95
300	min	1.46	1.56	1.6	1.64	1.65	1.68	1.72
600	min	0.855	0.913	0.94	0.96	0.97	0.978	0.992
1200	min	0.432	0.468	0.498	0.51	0.513	0.52	0.527

Discharge Rates in Amperes to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	15.3	17.6	18.9	19.5	19.7	19.9	20.2
10	min	10.5	11.7	11.9	12.1	12.2	12.3	12.4
15	min	7.56	8.22	8.71	8.92	8.99	9.07	9.15
30	min	4.39	4.94	5.11	5.25	5.3	5.35	5.41
60	min	2.36	2.61	2.73	2.84	2.87	2.91	2.94
120	min	1.32	1.44	1.5	1.54	1.55	1.57	1.59
180	min	1.09	1.15	1.18	1.2	1.21	1.22	1.23
240	min	0.84	0.891	0.916	0.942	0.948	0.955	0.963
300	min	0.776	0.812	0.825	0.837	0.841	0.846	0.852
600	min	0.435	0.452	0.464	0.473	0.477	0.481	0.486
1200	min	0.219	0.233	0.241	0.247	0.25	0.253	0.257

All data on the spec. sheet is an average value:

The tolerance range : X < 6min (+15%~-15%), 6min ≤ X < 10min (+12%~-12%), 10min ≤ X < 60min (+8%~-8%), X ≥ 60min (+5%~-5%)

Aug2020

Performance may vary depending on application. All specifications are correct at time of creation. All specifications and operation conditions contained in this datasheet are subject to change or improvement without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us.