

12SB35WHR (12V 35Wh)

SPECIFICATIONS

Nominal Voltage (V) 12V

Nominal Capacity

10 min rate (212W to 9.60V)	36Wh
20 hour rate (0.332A to 10.50V)	6.64Ah
10 hour rate (0.570A to 10.50V)	5.7Ah
5 hour rate (1.020A to 10.20V)	5.1Ah
1C (6A to 9.60V)	3.8Ah
3C (18A to 9.60V)	2.4Ah

Weight Approx. 1.93kg (4.25lbs)

Internal Resistance (@1kHz) Approx. 16mΩ

Maximum Discharge Current
For 5 seconds 90A

Charging Methods @25°C (77°F)

Cycle Use:
Charging Voltage 14.4V to 15.0V
Coefficient -5.0mV/°C/Cell
Maximum Charging Current 1.8A

Standby Use:
Float Charging Voltage 13.50V to 13.80V
Coefficient -3.0mV/°C/Cell

Operating Temperature Range


Charge	-15°C (5°F) to +40°C (104°F)
Discharge	-15°C (5°F) to +50°C (122°F)
Storage	-15°C (5°F) to +40°C (104°F)

Charge Retention (Shelf Life) @20°C (68°F)

1 month	92%
3 months	90%
6 months	80%


Case Material ABS

Terminal F1 or F2 (Faston Tab 187 or 250)

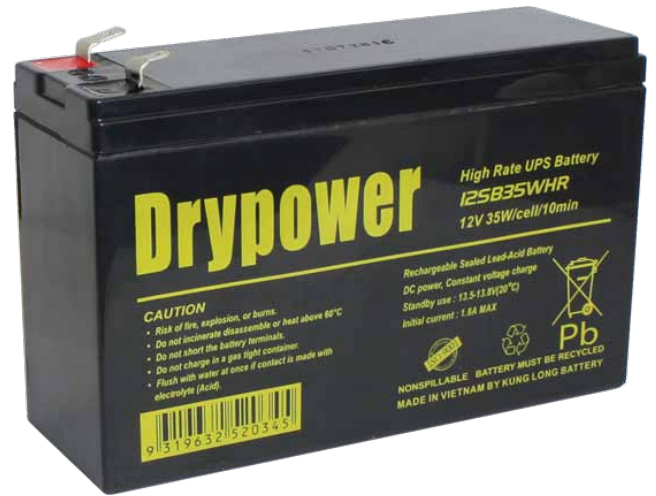


DIMENSIONS


mm (inch)

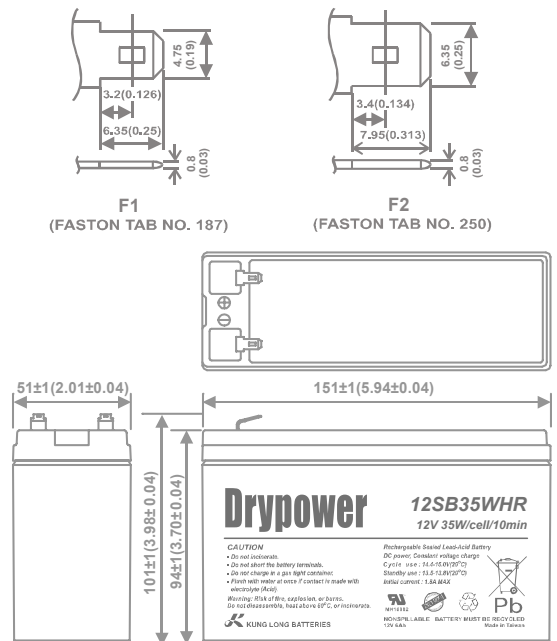


(V) FOR 12V BATTERY Discharge Time VS. Discharge Current (25°C)

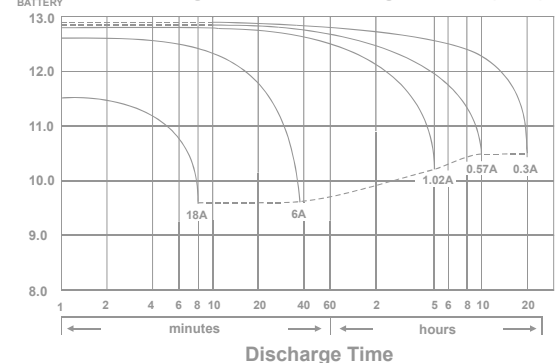


Effect of Temperature on Capacity 25°C(77°F)

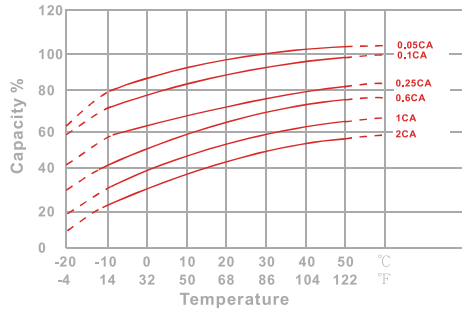


Capacity Retention Characteristic

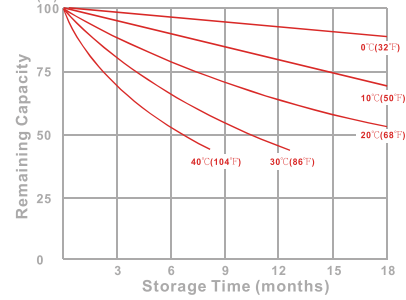

Trickle (or float) Service Life



Cycle Service Life

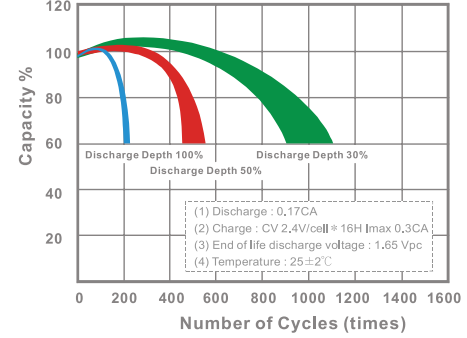

- PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25°C (77°F)

Time	End Voltage	1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
5	min	227	262	284	302	308	315	324
8	min	168	195	214	228	234	239	246
10	min	154	175	188	198	203	206	212
15	min	122	134	143	150	152	155	158
20	min	97.5	106	114	120	121	123	125
30	min	79.8	85.5	88.6	91.4	92.6	93.8	95.6
60	min	43.2	46.4	48.2	49.8	50.3	50.9	51.8
120	min	26.4	27.9	29.2	30.1	30.4	30.8	31.3
300	min	12.1	12.8	13.3	13.7	13.8	14.0	14.2
600	min	7.58	7.72	7.81	7.88	7.90	7.93	7.97
1200	min	4.13	4.20	4.25	4.30	4.32	4.34	4.36

- Discharge Rates in Amperes to Various End Voltages at 25°C (77°F)

Time	End Voltage	1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
5	min	19.1	22.6	24.9	27.0	27.7	28.6	29.8
8	min	17.0	18.8	19.9	20.8	21.1	21.5	22.1
10	min	14.2	15.7	16.8	17.7	18.0	18.4	19.0
15	min	11.3	12.2	12.9	13.4	13.6	13.7	13.9
20	min	9.71	10.2	10.3	10.7	10.9	11.0	11.2
30	min	6.78	7.19	7.46	7.69	7.78	7.90	8.07
60	min	3.63	3.85	4.00	4.13	4.19	4.24	4.32
120	min	1.88	2.01	2.12	2.21	2.25	2.29	2.34
300	min	0.961	1.032	1.071	1.097	1.108	1.12	1.13
600	min	0.593	0.612	0.619	0.626	0.628	0.631	0.636
1200	min	0.319	0.327	0.332	0.337	0.339	0.341	0.343

All data on the spec. sheet is an average value:

The tolerance range : $X < 6\text{min}$ (+15%~-15%), $6\text{min} \leq X < 10\text{min}$ (+12%~-12%), $10\text{min} \leq X < 60\text{min}$ (+8%~-8%), $X \geq 60\text{min}$ (+5%~-5%)

Performance may vary depending on application. All specifications are correct at time of creation. All specifications and operation conditions contained in this datasheet are subject to change or improvement without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us.